

PP FOOT VALVE - Flange End



TECHNICAL DATA :

CONSTRUCTION : Ball type, Soft seated

DESIGN AND MANUFACTURING STD. : As per Manufacturer's Standard


END CONNECTIONS : Flanged as per ANSI B 16.5 (150 #) as per BS 10 (Table D/E/F) & DIN STD.

AVAILABLE M.O.C. :

PP (POLYPROPYLENE)

ISOTACTIC PP

PVDF (POLYVINYLIDENE FLUORIDE)

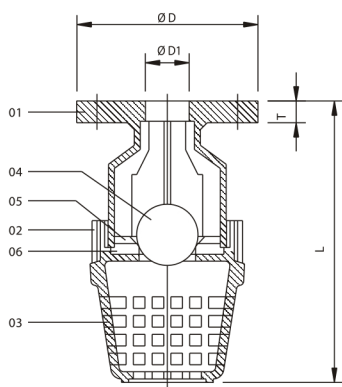

NO.	DESCRIPTION	MATERIAL OPTION	QTY.
01	TOP BODY	PP / ISOPP / PVDF	1
02	BOTTOM BODY	PP / ISOPP / PVDF	1
03	SCREEN	PP / ISOPP / PVDF	1
04	BALL	M.S.PP / ISOPP / PVDF COATED	1
05	BALL RING	PP / ISOPP / PVDF	1
06	SEAT RING	NEOPRENE RUBBER	1

ALL DIMENSIONS ARE IN MM (±2 MM)

SIZE	Ø D	Ø D1	H	T
IN. MM				
1 " 25	122.5	26.0	189.0	18.0
1 ½ " 40	140.0	45.0	212.0	21.0
2 " 50	166.5	51.0	218.0	23.0
2 ½ " 65	182.0	64.5	295.0	25.0
3 " 80	199.0	77.5	300.0	26.0
4 " 100	229.0	102.0	368.0	26.0
6 " 150	308.0	150.0	460.0	30.0
8 " 200	368.0	203.0	464.0	27.0

PP FOOT VALVE - Screw End



TECHNICAL DATA :

CONSTRUCTION : Ball type, Soft seated

DESIGN AND MANUFACTURING STD. : As per Manufacturer's Standard


END CONNECTIONS : Screw end (BSP thread)

AVAILABLE M.O.C. :

PP (POLYPROPYLENE)

ISOTACTIC PP

PVDF (POLYVINYLIDENE FLUORIDE)

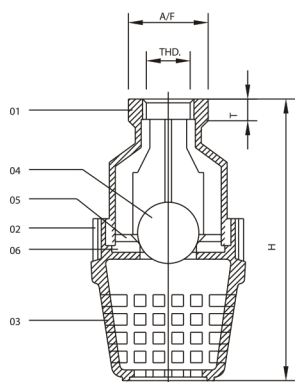

NO.	DESCRIPTION	MATERIAL OPTION	QTY.
01	TOP BODY	PP / ISOPP / PVDF	1
02	BOTTOM BODY	PP / ISOPP / PVDF	1
03	SCREEN	PP / ISOPP / PVDF	1
04	BALL	M.S.PP / ISOPP / PVDF COATED	1
05	BALL RING	PP / ISOPP / PVDF	1
06	SEAT RING	NEOPRENE RUBBER	1

ALL DIMENSIONS ARE IN MM (±2 MM)

SIZE IN.	MM	A / F	THDS.	H	T
1 "	25	54	1 "	195	22
1 ¼ "	32	54	1 ¼ "	195	22
1 ½ "	40	68	1 ½ "	218	24
2 "	50	78	2 "	218	24
2 ½ "	65	93	2 ½ "	303	29
3 "	80	108	3 "	303	29
4 "	100	135	4 "	377	32